



- 1、 Display type: TFT/Normal white
- 2、 Display mode: Transmissive
- 3、 Controller: ST7789S/V
- 4、 Backlight: White VF=3.2V IF=60mA
- 5、 LCM Luminance: 200cd/m² TYP
- 6、 Operating temperature: -20°C ~ +70°C
- 7、 Storage temperature: -30°C ~ +80°C
- 8、 With touch panel
- 9、 ROHS REQUEST

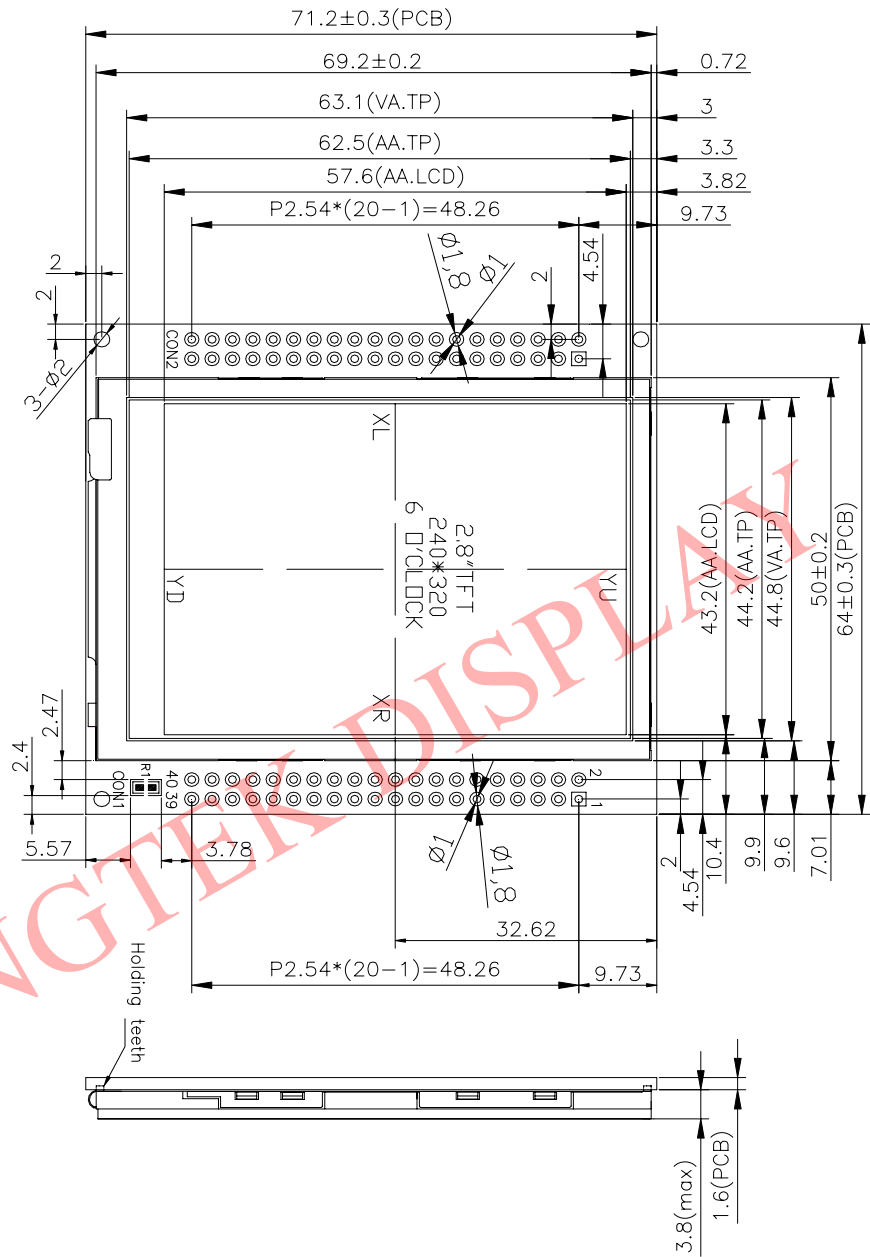

PIN	SYMBOL	PIN	SYMBOL
1	DB0	21	NC
2	DB1	22	DB4
3	DB2	23	DB8
4	DB3	24	DB9
5	GND	25	DB10
6	VCC1	26	DB11
7	/CS	27	DB12
8	RS	28	DB13
9	/WR	29	DB14
10	/RD	30	DB15
11	IM0	31	/RESET
12	XR	32	VCI
13	YD	33	VCC2
14	XL	34	GND
15	YU	35	DB5
16	LEDA	36	DB6
17	LEDK1	37	DB7
18	LEDK2	38	NC
19	LEDK3	39	NC
20	LEDK4	40	NC

IM0=L:16BIT,D0-D15
IM0=H:8BIT,D8-D15

Unit: mm
Tolerance: ±0.2

